


## LAN CABLE Category 6A Un-shield



## LAN CABLE Category 6A Shield

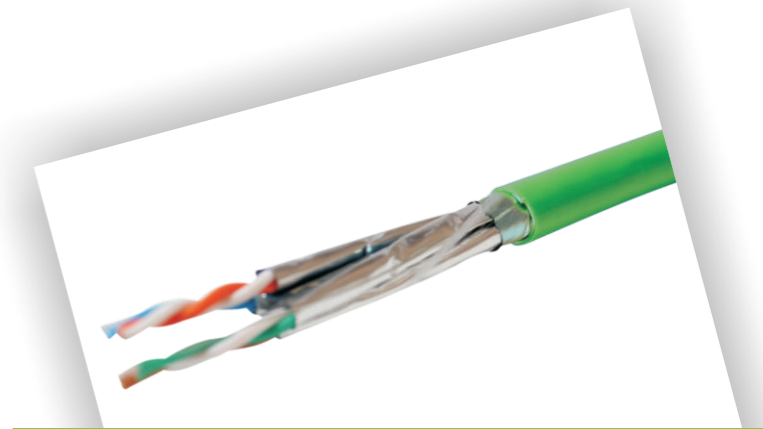

### Category 6A U/UTP 10G Cable UNSHIEDED COPPER CABLING SYSTEM

DESCRIPTION	SPECIFICATION														
<p>LANSAN Category 6A U/UTP 10G Cable support high speed Enterprise and Data Center applications</p> <p>Cables designed in Saw-tooth structure to against Alien Crosstalk.</p> <p>Combined with Un-Shield Keystone, Patch Cords and Patch Panel, it provides excellent compatible performance.</p>	<table border="0"> <tr> <td>Conductor</td> <td>23AWG, Solid Copper</td> </tr> <tr> <td>Insulation</td> <td>Foamed Polyethylene (FPE)</td> </tr> <tr> <td>Outer Sheath</td> <td>Low Smoke Zero Halogen (LSZH)</td> </tr> <tr> <td>Installation Temperature</td> <td>0°C ~ +50°C</td> </tr> <tr> <td>Operating Temperature</td> <td>-20°C ~ +60°C</td> </tr> <tr> <td>Installation Min Bend Radius</td> <td>70mm</td> </tr> <tr> <td>Operating Min Bend Radius</td> <td>40mm</td> </tr> </table>	Conductor	23AWG, Solid Copper	Insulation	Foamed Polyethylene (FPE)	Outer Sheath	Low Smoke Zero Halogen (LSZH)	Installation Temperature	0°C ~ +50°C	Operating Temperature	-20°C ~ +60°C	Installation Min Bend Radius	70mm	Operating Min Bend Radius	40mm
Conductor	23AWG, Solid Copper														
Insulation	Foamed Polyethylene (FPE)														
Outer Sheath	Low Smoke Zero Halogen (LSZH)														
Installation Temperature	0°C ~ +50°C														
Operating Temperature	-20°C ~ +60°C														
Installation Min Bend Radius	70mm														
Operating Min Bend Radius	40mm														
FEATURES	STANDARDS COMPLIANCE														
<ul style="list-style-type: none"> <li>* Independently tested and verified by ETL</li> <li>* Guaranteed to meet TIA 568 C.2 and ISO/IEC 11801 specifications</li> <li>* Saw-tooth Structure design</li> </ul>	<ul style="list-style-type: none"> <li>* TIA 568 C.2</li> <li>* ISO 11801 CLASS EA</li> <li>* UL Listed</li> </ul>														

#### ORDERING INFORMATION

Part No.	Description
L096A **	LS-6A U/UTP Cat.6A PVC CM Green 305m/Box
L096AR **	LS-6A U/UTP Cat.6A PVC CMR Brown 305m/ Box
L096AP **	LS-6A U/UTP Cat.6A PVC CMP Red 305m/ Box
L096AL **	LS-6A U/UTP Cat.6A LSZH Green 305m/ Box

### Category 6A F/FTP 10G Cable SHIEDED COPPER CABLING SYSTEM

DESCRIPTION	SPECIFICATION																
<p>LANSAN Category 6A F/FTP 10G Cable support high speed Enterprise and Data Center applications</p> <p>Double Shield Structure Provide better Noise Protection to against Alien Crosstalk.</p> <p>Combined with Shield Keystone, Patch Cords and Patch Panel, it provides excellent compatible performance.</p>	<table border="0"> <tr> <td>Conductor</td> <td>23AWG, Solid Copper</td> </tr> <tr> <td>Insulation</td> <td>Foamed Polyethylene (FPE)</td> </tr> <tr> <td>Shield</td> <td>Individual / Overall Aluminum Foil / Drain wire</td> </tr> <tr> <td>Outer Sheath</td> <td>Low Smoke Zero Halogen (LSZH)</td> </tr> <tr> <td>Installation Temperature</td> <td>0°C ~ +50°C</td> </tr> <tr> <td>Operating Temperature</td> <td>-20°C ~ +60°C</td> </tr> <tr> <td>Installation Min Bend Radius</td> <td>70mm</td> </tr> <tr> <td>Operating Min Bend Radius</td> <td>40mm</td> </tr> </table>	Conductor	23AWG, Solid Copper	Insulation	Foamed Polyethylene (FPE)	Shield	Individual / Overall Aluminum Foil / Drain wire	Outer Sheath	Low Smoke Zero Halogen (LSZH)	Installation Temperature	0°C ~ +50°C	Operating Temperature	-20°C ~ +60°C	Installation Min Bend Radius	70mm	Operating Min Bend Radius	40mm
Conductor	23AWG, Solid Copper																
Insulation	Foamed Polyethylene (FPE)																
Shield	Individual / Overall Aluminum Foil / Drain wire																
Outer Sheath	Low Smoke Zero Halogen (LSZH)																
Installation Temperature	0°C ~ +50°C																
Operating Temperature	-20°C ~ +60°C																
Installation Min Bend Radius	70mm																
Operating Min Bend Radius	40mm																
FEATURES	STANDARDS COMPLIANCE																
<ul style="list-style-type: none"> <li>* Independently tested and verified by ETL</li> <li>* Guaranteed to meet TIA 568 C.2 and ISO/IEC 11801 specifications</li> <li>* Double Shield Protection</li> </ul>	<ul style="list-style-type: none"> <li>* TIA 568 C.2</li> <li>* ISO 11801 CLASS EA</li> <li>* UL Listed</li> </ul>																

#### ORDERING INFORMATION

Part No.	Description
L096AF2 **	LS-6A F/FTP Cat.6A PVC CM Green 305m/Drum
L096ARF2 **	LS-6A F/FTP Cat.6A PVC CMR Brown 305m/Drum
L096APF2 **	LS-6A F/FTP Cat.6A PVC CMP Red 305m/Drum
L096ALF2 **	LS-6A F/FTP Cat.6A LSZH Green 305m/Drum